

CAPILLARY THERMOSTATS - EGO

55.13204.010

SPDT Changeover contacts 16A 240V
Range:- 0°C to 40°C
Bulb size:- 6mm x 149mm
Capillary:- 1450mm
Differential:- 1.5°C
Knob:- 524.104A




55.13202.130

SPDT Changeover contacts 16A 240V
Range:- 20°C to 50°C
Bulb size:- 6mm x 175mm
Capillary:- 830mm
Differential:- 1.5°C
Knob:- 524.103A




55.13012.010

SPST 16A 240V
Range:- 30°C to 85°C
Bulb size:- 6mm x 149mm
Capillary:- 830mm
Differential:- 4°C
Knob:- 524.837

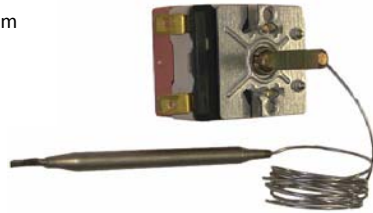

55.13022.050

SPST 16A 240V
Range:- 30°C to 110°C
Bulb size:- 6mm x 115mm
Capillary:- 830mm
Differential:- 3°C
Knob:- 524.105A

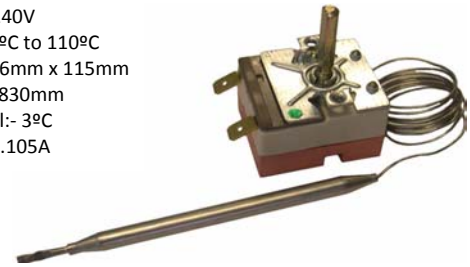


55.17024.010

SPST 16A 240V with Stuffing Gland
Range:- 30°C to 110°C
Bulb size:- 6mm x 94mm
Capillary:- 1460mm
Differential:- 3°C
Knob:- 524.105A



55.18224.010

SPDT Changeover contacts 16A 240V
Range:- 30°C to 110°C
Bulb size:- 6mm x 113mm
Capillary:- 1470mm
Differential:- 3°C
Knob:- 524.105A

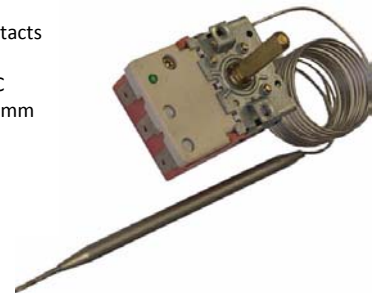

55.17022.010

SPST 16A 240V with Stuffing Gland
Range:- 30°C to 120°C
Bulb size:- 6mm x 113mm
Capillary:- 860mm
Differential:- 3°C
Knob:- 524.115A



55.13034.040

SPST 16A 240V with Stuffing Gland
Range:- 60°C to 200°C
Bulb size:- 6mm x 77mm
Capillary:- 1430mm
Differential:- 5°C
Knob:- 524.106A



55.13052.110

SPST 16A 240V
Range:- 65°C to 288°C
Bulb size:- 4mm x 93mm
Capillary:- 830mm
Differential:- 8°C
Knob:- 524.101A



55.13042.180

SPST 16A 240V with Stuffing Gland
Range:- 95°C to 205°C
Bulb size:- 4mm x 157mm
Capillary:- 830mm
Differential:- 4°C
Knob:- 524.102A

55.13042.230

As above but with Gold Contacts
0.5A for Gas Fryers

